



Generator Set		Stand by	Prime
Power	kVA	66	59,40
Power	kW	52.8	47,52
Frequency	Hz	50	
Voltage	V	230/400	
Fuel Type		Diesel	
Control Panel		Datakom D309	
Cabin		AK 10	

Prime Power (PRP)

According to ISO 8528-1:2005, Prime power is the maximum power which a generating set is capable of delivering continuously whilst supplying a variable electrical load when operated for an unlimited number of hours per year under the agreed operating conditions with the maintenance intervals and procedures being carried out as prescribed by the manufacturer. The permissible average power output (Ppp) over 24 h of operation shall not exceed 70 % of the PRP.

Emergency Standby Power (ESP):

According to ISO 8528-1:2005, Emergency standby power is the maximum power available during a variable electrical power sequence, under the stated operating conditions, for which a generating set is capable of delivering in the event of a utility power outage or under test conditions for up to 200 h of operation per year with the maintenance intervals and procedures being carried out as prescribed by the manufacturers. The permissible average power output over 24 h of operation shall not exceed 70 % of the ESP.

Engine

Service	Specifications	
Brand	PERKINS	
Net Motor Output Power	<i>kW</i>	54
Standby Output Power	<i>kW</i>	59
Brand	Perkins	
Model	1103A-33TG2	
Engine Type	4 Stroke - Diesel	
Injection System	Direct Injection	
Suction Type	Turbo Charger	
Number of Cylinders	3	
Bore and Stroke	<i>mm</i>	105 x 127
Cylinder Volume	<i>L</i>	3,3
Cooling Type	Water Cooled	
Compression Ratio	17.25:1	
Fuel Consumption at Stand by Load	<i>l/h</i>	15,4
100% Fuel Consumption at Prime Load	<i>l/h</i>	13,9
75% Fuel Consumption at Prime Load	<i>l/h</i>	10,4
50% Fuel Consumption at Prime Load	<i>l/h</i>	7,2
Total Oil Capacity	<i>L</i>	8,3
Total Cooling Capacity	<i>L</i>	10,2
Governor Type	<i>Type</i>	Mechanical

Replaceable cylinder jacket
Dry type replaceable oil filter
Heat-resistant radiator for 50 °C

Standard Features

4 Stroke, 1500 RPM, water cooled heavy duty diesel engine
Protection system on Manuel run
Flexible oil pipes and oil draining valve
Pre-heater
Lubrication oil and anti-freeze
Batteries and cables
Electrostatic paint coated, steel, welded chassis
Fuel tank housed in the chassis
Industrial type silencer
Electronic battery charger
Electrical wiring diagram
User manual and operating manual
Automatic working time 10 second

Alternator

Service	Specifications	
Brand	Leroy Somer	
Model	TALA42H / TAL042H	
Output Voltage	<i>V</i>	230/400
Frequency	<i>HZ</i>	50
Automatic Voltage Regulation	$\pm\%$	1
Alternator Standby Power	<i>kVA</i>	66
Alternator Continuous Use Power	<i>kVA</i>	60
Power Factor	<i>Cosφ</i>	0,8
Number of Cables	6	
Winding Pitch	2/3	
Protection Class	IP23/H	
Warning System	Self-excited	
Execution System	Electronic AVR	
Performance - PF 0.8 / 75% Load	<i>%</i>	89,6

4 Poles, Self-Excitation, Brushless, Synchron type alternator
Electronic type automatic voltage regulator (AVR)
Self Cooled

Optional Equipment


Engine
Remote Radiator Cooling
Oil heater
Fuel-Water Separator Filter

Alternator
Main line circuit breaker
Anti-Condensation
Heater Over sized alternator

Control System
Remote communication with modem
Alarm output relays/ Charge Ammeter
Automatic synchronizing


Others Accessories
Automatic transfer switch
Remote control and monitoring
Alarm system for fuel level
Trailer 1 Phase - 3 Phase switch plugs
1500/3000 hours maintenance kit
Tool kit for maintenance
Inlet and outlet acoustic baffles
Inlet and outlet motorized louvers
Main Fuel Tank
Supplied with oil and coolant - 30 °C

Dimensions

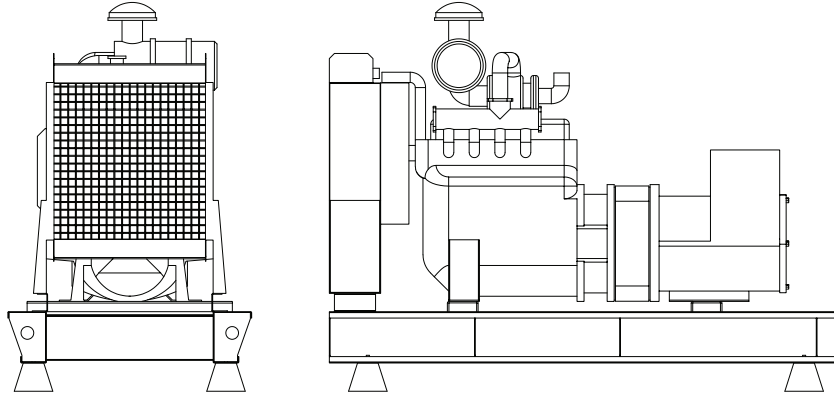

Open Type

Lenght x Width x Height	mm	2200 x 1105 x900
Weight	kg	890
Fuel Tank Capacity	lt	100

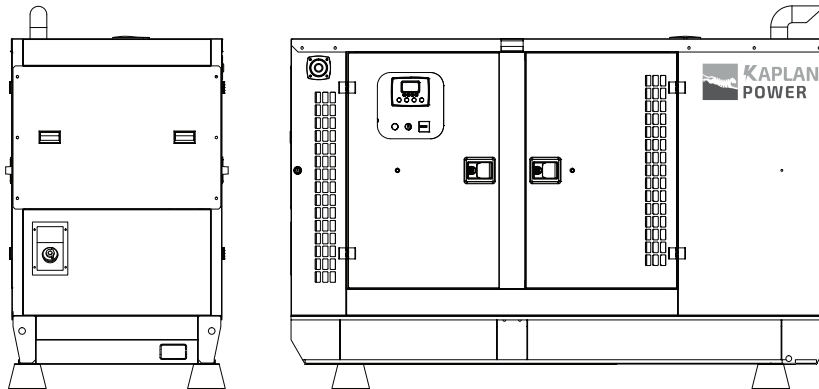

Canopied

Lenght x Width x Height	mm	2200 x 1000 x 1600
Weight	kg	1085
Fuel Tank Capacity	lt	100
Desibel	db(A)	65-75

Sound Proof Canopy Specifications

- Special design for minimizing acoustic level
- Galvanized steel construction further protected by polyester powder coat paint
- Black finish stainless steel locks and hinges
- Control panel viewing window in a lockable access door
- Emergency stop push button (red) mounted on enclosure exterior
- Lifting, drag and jacking points on base frame
- Radiator fill via removable, flush mounted rain cap fitted with compression seal

OPTIONAL GENSET CONTROLLERS

Next generation single gen-set controllers for Stand-by and Prime power applications combining multi-functionality and wide communication with EFI engines.

Datakom DKG 309



Datakom D500



Datakom D500-GSM



EMKO Trans-AUTO



DEEPSEA 7320



ComAp AMF25



	Datakom DKG 309	Datakom D500	Datakom D500-GSM	Deepsea 6120	Deepsea 7320	ComAp AMF25	EMKO Trans-AUTO
Automatic Mains Monitoring	✓	✓	✓	✓	✓	✓	✓
Manuel Start	✓	✓	✓	✓	✓	✓	✓
Remote Start	OPTIONAL	OPTIONAL	✓	X	OPTIONAL	OPTIONAL	OPTIONAL
Remote Monitoring With Sim Card	X	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL	OPTIONAL
1 Additional Option (Horn, Oil-Fuel Heater Etc.)	✓	✓	✓	✓	✓	✓	✓
Light Warning And Mimic Diagram	✓	✓	✓	✓	✓	✓	✓
Battery Charger	✓	✓	✓	✓	✓	✓	✓
Rs-485 Communication	OPTIONAL	✓	✓	X	✓	OPTIONAL	✓
Ethernet (Tcp-Ip) Communication	X	✓	✓	X	OPTIONAL	OPTIONAL	OPTIONAL

GENSET CONTROLLERS FOR SYNCHRONIZATION SYSTEMS

Next generation synchronizing genset controller capable of every communication and functionality.

Datakom D500 MK2



Datakom D700



DEEPSEA 8610



DEEPSEA 8620



DEEPSEA 8660



ComAp IntelliCompact NT SPtM



ComAp IntelliGen BaseBox



ComAp IntelliGen 200

